

Unbuffered Memory Module Data Sheet

MW01GN4013U58

1 GByte, PC3200 (400MHz) CL3 184 Pin DIMM

Description:

The **MW01GN4013U58** is a 1 Gigabyte Memory Module, organized as 128Mx64 bits DDR-SDRAM. It is composed by sixteen 64Mx8 DDR-SDRAMs ICs in TSOP package and one serial EEPROM for SPD (Serial Presence Detect), mounted on a JEDEC-Standard 184-pin DIMM (Dual In Line Memory Module) with golden contacts.

Features:

- 184-pin DIMM outline, unbuffered
- Double Data Rate architecture; two data transfers per clock cycle
- Internal pipelined double data rate (DDR) architecture, with two data accesses per clock cycle
- Uses 64Mx8 DDR-SDRAMs
- Differential clock inputs
- Programmable burst length: 2, 4 or 8
- Programmable CAS latency:
 - CL=3.0 @ 200MHz, 400MT/s
 - CL=2.5 @ 167MHz, 333MT/s
 - CL=2.0 @ 133MHz, 266MT/s
- EEPROM Serial Presence Detection (SPD)
- Bidirectional data strobe (DQS)
- Four internal device banks for concurrent operation
- 8192 refresh cycles/64ms (4 banks concurrent refresh)
- Auto precharge
- Auto-refresh and Self-refresh modes
- Row address A0-12
- Column address A0-9,11
- SSTL_2 Interface
- VDD = VDDQ = 2.6 V ± 0.1 V

Specification:

Symbol	AC Characteristic	Min.	Max.	Unit	
t _{CK}	CLK Cycle Time	CL=3.0	5	10	ns
		CL=2.5	6	13	ns
		CL=2.0	7.5	13	ns
t _{RC}	Row Cycle Time (Operation)	55	-	ns	
t _{RAS}	Row Active Time	40	70,000	ns	
t _{RFC}	Auto Refresh to Active / Auto Refresh command period	70	-	ns	


Ratings:

	Rating	Unit	Condition
Maximum Power Dissipation	24	W	Ta=25°C
Operating temperature	0 ~ 70	°C	
Storage temperature	-55 ~ 125	°C	

All values in this data-sheet are subject to change without notice. No responsibility is assumed by MemoWise for the use of information included herein, nor for any infringements of patents or other rights belonging to third parties which may result from their use.

WARNING: DO NOT USE IN LIFE SUPPORT

MEMOWISE PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF MCT - Marketing & Consultoria em Tecnologia Ltda.

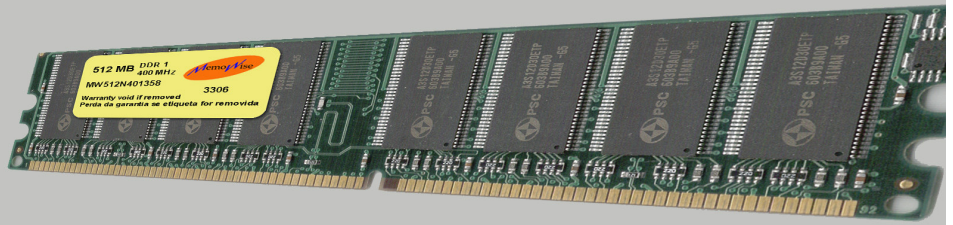

Unbuffered Memory Module Data Sheet — MW01GN4013U58

Dimensions

All dimensions are in Inches; tolerance is $\pm 0.005''$ unless otherwise indicated

