

Unbuffered Memory Module Data Sheet

MW01GN6625UA8

1 GByte, DDR2, PC2-5300 (667 MHz) CL5 240 Pin DIMM

MW01GN8026UA8

1 GByte, DDR2, PC2-6400 (800 MHz) CL5 240 Pin DIMM

Description:

MW01GN6625UA8/MW01GN8026UA8 are 1 Gigabyte Memory Modules, organized as 128Mx64 bits DDR2-SDRAM. Each module is composed by eight 128Mx8 DDR2-SDRAMs ICs in FBGA package and one serial EEPROM for SPD (Serial Presence Detect), mounted on a JEDEC-Standard 240-pin DIMM (Dual In Line Memory Module) with golden contacts.

Features:

- 240-pin DIMM outline, unbuffered
- Double Data Rate architecture; two data transfers per clock cycle
- On-Die Termination Control
- Uses 128Mx8 DDR2-SDRAMs
- Differential clock inputs
- Programmable burst length: 4 or 8
- Clock Cycle Time (MW01GN6625UA8)
 - (t_{CK}) = 3.00 ns (min.) / 8 ns (max.) @ CL=5
- Clock Cycle Time (MW01GN8026UA8)
 - (t_{CK}) = 2.50 ns (min.) / 8 ns (max.) @ CL=6
- EEPROM Serial Presence Detection (SPD)
- Bidirectional, differential data strobe (DQS and / DQS)
- Eight internal device banks for concurrent operation
- Refresh to Active (t_{RFC}): 127.5 ns (min)
- Auto precharge
- Auto-refresh and Self-refresh modes
- Row address A_0 - A_{13}
- Column address A_0 - A_9
- Bank address: BA_0 ~ BA_2
- SSTL_18 Interface

Specification:

Symbol	AC Characteristic	Min.	Max.	Unit	
t_{CK}	CLK Cycle Time	MW01GN6625UA8 CL=5	3000	8000	ps
		MW01GN8026UA8 CL=6	2500		
t_{RC}	Row Cycle Time (Operation)	MW01GN6625UA8	57	-	ns
		MW01GN8026UA8	57.5		
t_{RAS}	Row Active Time	45	70,000	ns	
t_{RFC}	Auto Refresh to Active / Auto Refresh Command Time	127.5	-	ns	

Ratings:

		Rating	Unit	Cond.
Power Dissipation, Operating (Row Activating, Precharge) @VDD, VDDQ = 1.8V	MW01GN6625UA8	2.592	W	Ta=25 °C
	MW01GN8026UA8	2.664		
Operating temperature ¹		0 ~ 85	°C	
Storage temperature		-55 ~ 100	°C	


Note:

1. It refers to the operating case temperature of DRAM ICs

All values in this data-sheet are subject to change without notice. No responsibility is assumed by MemoWise for the use of information included herein, nor for any infringements of patents or other rights belonging to third parties which may result from their use.

WARNING: DO NOT USE IN LIFE SUPPORT

MEMOWISE PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF MEMOWISE TECNOLOGIA INDÚSTRIA ELETRÔNICA LTDA.

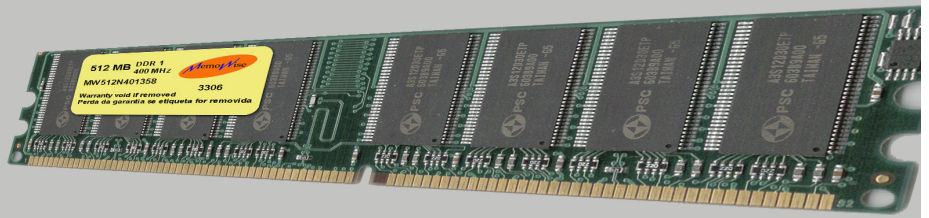

Unbuffered Memory Module Data Sheet — MW01GN6625UA8 / MW01GN8026UA8

Dimensions

All dimensions are in millimeters (Inches); tolerance is ± 0.127 (0.005") unless otherwise indicated

